

## PowerBlock Mobile







**625kw T4F PowerBlock Mobile**  
\*Image shown may not reflect actual configuration.

The **PowerBlock Mobile (PBM)** from PowerSecure provides a reliable and flexible source of temporary power. The PBM utilizes an **EPA-Certified Tier IV Final Emissions** engine for any application, whether planned or in an emergency situation. A key element of the PBM is the ability to increase capacity and redundancy by paralleling multiple units.

PowerSecure offers the only mobile generator at 625kW, the PowerBlock Mobile unit is ready to provide clean power wherever and whenever.

### BENEFITS

- EPA/CARB Certified Tier IV Final emission engine; no DPF required
- Two-Axle, Air-Ride Chassis with Anti-Lock Brake system
- 20' ISO container mounted on a legal highway trailer
- NFPA 110 Compliant for Load Acceptance
- Capable of paralleling multiple PBM's for additional capacity
- Cable storage under chassis — secure all necessary cables for each site
- Color HMI display — view Controller Status, Analog Values, Alarms, & Event History
- Optional Remote Monitoring with PowerControl
- Rapid Deployment Optional Docking Station for a sealed, secure connection for extended/semi-permanent applications

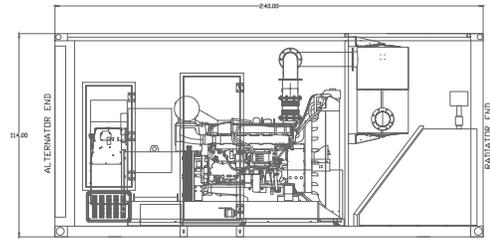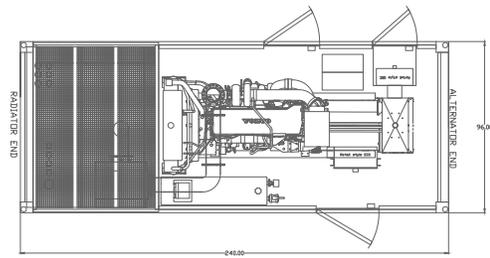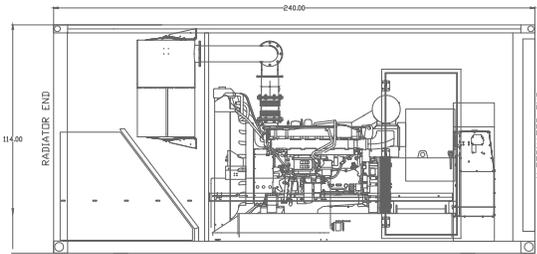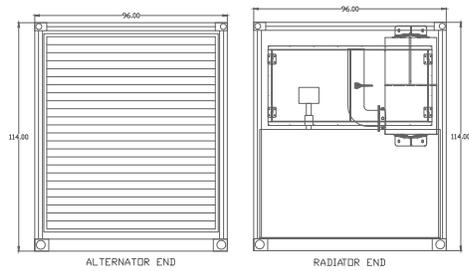

625kw T4F PowerBlock Mobile

## FEATURES



- 24-Hour Fuel/DEF capacity at full load
- Cam-Lok Fuel Fill with overfill prevention valve & spill bucket
- Vent Whistle at 95% fuel capacity
- Lockable Cable Storage
- Engine-area Fluid Containment
- Door holdbacks to secure open
- Vertical air discharge plenum
- 15 dBA average noise reduction
- Fixed vertical blade aluminum intake louvers
- External oil & coolant drains
- Padlock-style doors with internal panic release
- Stowable, OSHA Compliant stairs with handrail
- Emergency Stop
- Internal DC lights with mechanical timer switch
- Two-wire start capability
- Female Cam-Lok receptacles
- Battery shutoff switch
- 120VAC connection for Battery Charger (NEMA 5-15 PR)
- 240VAC connection for Block Heater (NEMA 14-30 P)
- Ability to load share

TWD1673GE  
Ratings  
Tier 4

Voltage	Emergency Standby	Prime	Limited-time running	Continuous	kva @ .8 lag
277/480	625	560	540	470	781